

SEL SEL-4388 MIRRORED BITS® Tester

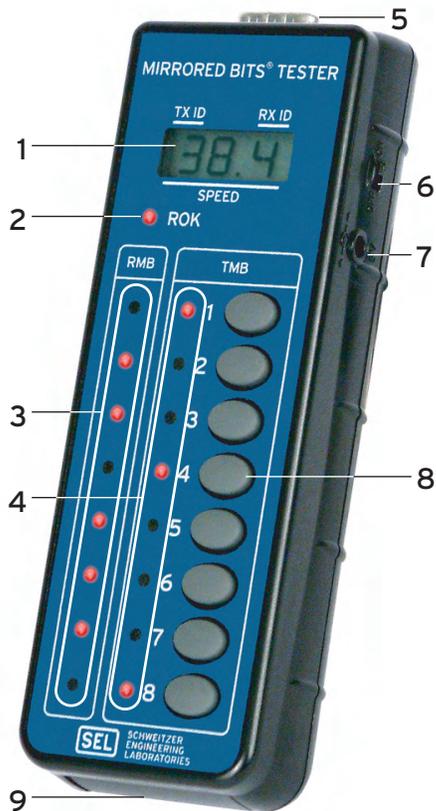


Figure 1 SEL-4388 MIRRORED BITS Tester

- Display:** Three-segment LCD shows RX_ID (right) and TX_ID (left), alternating with detected data rate (SPEED).
- ROK LED:** Illuminates when receiving valid MIRRORED BITS data (after synchronization)—see *Synchronization on page 2*.
- RMB LEDs:** Always display the active receive state of the eight Receive MIRRORED BITS (RMBs).
- TMB LEDs:** Always display the active transmit state of the eight Transmit MIRRORED BITS (TMBs).
- Port:** Connects to a MIRRORED BITS communications channel: male, subminiature, 9-pin D connector. Supplied cables: C602 (straight through), C603 (null modem or cross-over cable).
Pin 1 = +5 Vdc*;
Pin 2 = Data Out;
Pin 3 = Data In;
Pin 5 = Ground;
Pin 8 = +6 Vdc
* requires external ac power adaptor 230-0601
- ON/OFF Switch (for battery power only):** OFF conserves batteries when not in use or when using the External Power Input.
- External Power Input:** Accepts 4–18 Vdc, center pin is positive (+) on the 0.7 mm coaxial dc jack. Optional ac power adaptor is 230-0601.
- TMB Pushbuttons:** Directly assert and deassert eight Transmit MIRRORED BITS (TMBs). If connection is interrupted,


TMBs remain latched until a new synchronization process occurs (aids in testing intermittent or marginal channels).

- Battery Compartment:** Provides internal power option. Uses two alkaline AAA batteries (Ray-O-Vac® 824 or equivalent).

Major Features and Benefits

- Save time by confirming MIRRORED BITS addresses and data rate.
- Quickly and easily troubleshoot communications links.
- Use as a training aid for new-to-MIRRORED BITS personnel.
- Use portable, battery-powered tester anywhere.

Applications

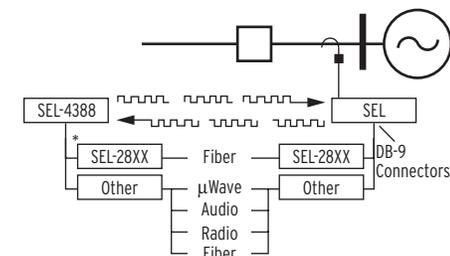

* Use a null-modem cable (C603, included), and appropriate gender changer (240-1551-M/M, DB-9, accessory) as needed.

Figure 2 Functional Diagram

Operation

Power-On Sequence

- Connect MIRRORRED BITS communications network (see *Figure 2*).
- Move ON/OFF Switch to ON, or apply external power.
- Observe synchronization process
 - Sequential LED test
 - Sequential LCD-segment test
 - “S E L” appears on the LCD
 - LEDs blink while detecting data rate
 - ROK LED illuminates

Normal Operation

Read parameters and operate TMB pushbuttons. The display shows the RX_ID and TX_ID needed to communicate with the device to which the SEL-4388 is connected, not the actual ID settings of the connected device.

Synchronization

Synchronization occurs when the tester detects a change in RX_ID, TX_ID, or data rate (SPEED).

Troubleshooting

Alarm State—SEL-4388 illuminates all LEDs for 10 seconds, then extinguishes LEDs (except latched TMB LEDs).



Sleep State—“S E L” remains on the front-panel LCD.

Power-on with no MIRRORRED BITS communications: Alarm State, then Sleep State

Lost connection: Alarm State, then Sleep State

Connected to non-MIRRORRED BITS protocol: Alarm State, then Sleep State

Data rate (SPEED) outside range: Alarm State, then Sleep State

Specifications

MIRRORRED BITS Protocol

MB (MBA and MBB), MB8

Port Data Rate (SPEED)

2400 to 38400 bps

Power Supply

Internal

Two AAA batteries
(Ray-O-Vac 824 or equivalent)

External

Range: 4–18 Vdc
Burden: <120 mW

Battery Operating Life

30 hours with all LEDs illuminated

Operating Temperature Range

0 to +45°C (+32° to +113°F)

Humidity

0% to 95% without condensation

Unit Weight (with batteries)

0.2 kg (0 lb, 7 oz)

Dimensions (H x W x D)

146 mm x 53 mm x 32 mm
(5.75 in. x 2.10 in. x 1.25 in.)

Factory Assistance

We appreciate your interest in SEL products and services. If you have questions or comments, please contact us at:

Schweitzer Engineering Laboratories, Inc.
2350 NE Hopkins Court
Pullman, WA 99163-5603 USA
Telephone: +1.509.332.1890
Fax: +1.509.332.7990
Internet: www.selinc.com
Email: info@selinc.com

© 2005-2007 by Schweitzer Engineering Laboratories, Inc. All rights reserved.

All brand or product names appearing in this document are the trademark or registered trademark of their respective holders. No SEL trademarks may be used without written permission. SEL products appearing in this document may be covered by US and Foreign patents.

Schweitzer Engineering Laboratories, Inc. reserves all rights and benefits afforded under federal and international copyright and patent laws in its products, including without limitation software, firmware, and documentation.

The information in this document is provided for informational use only and is subject to change without notice. Schweitzer Engineering Laboratories, Inc. has approved only the English language document.

This product is covered by the standard SEL 10-year warranty. For warranty details, visit www.selinc.com or contact your customer service representative. Date Code 20070611