

Figure 1

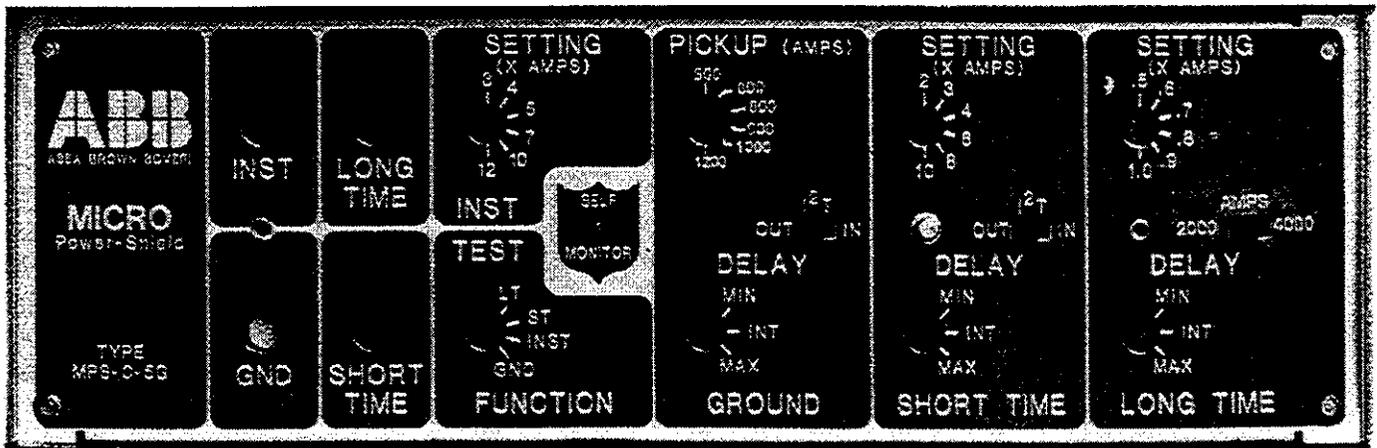


Figure 2 - AVAILABLE MPS-C TRIP UNITS

ADJUSTABLE PROTECTIVE TRIP ELEMENTS										
TYPE	LONG-TIME		SHORT-TIME		INSTANTANEOUS	GROUND		CHARACTERISTIC CURVES		
	SETTING	DELAY	SETTING	DELAY		SETTING	SETTING	DELAY	OVCT.	I _t
MPS-C-3	X	X	---	---	X	---	---	TD9650	---	---
MPS-C-3G	X	X	X	X	X	X	X	TD9650	---	TD9652
MPS-C-4	X	X	X	X	---	---	---	TD9651	TD9653	---
MPS-C-4G	X	X	X	X	---	X	X	TD9651	TD9653	TD9652
MPS-C-5	X	X	X	X	X	---	---	TD9651	TD9653	---
MPS-C-5G	X	X	X	X	X	X	X	TD9651	TD9653	TD9652

CURRENT SENSORS AND CIRCUIT BREAKER RATINGS

SENSOR RATING	AMPERE RANGE SELECTOR SETTING	GROUND PRIMARY AMPERES SETTING	AVAILABLE ON CIRCUIT BREAKER TYPES
200	100, 200	100, 200, 300, 600, 900, 1200	K 800M, K DON 800M
800	400, 800	100, 200, 300, 600, 900, 1200	K 800M, K DON 800M, K 1600M
1600	800, 1600	300, 400, 600, 800, 1000, 1200	K 1600M, K DON 1600M, K 2000M
2000	100, 2000	300, 400, 600, 800, 1000, 1200	K 200M