

Empro Shunts

Accuracy: 1/4%

Recommended continuous operation: <2/3 rated current



Type A ▲




Type B ▲



Type C ▲



Type E ▲

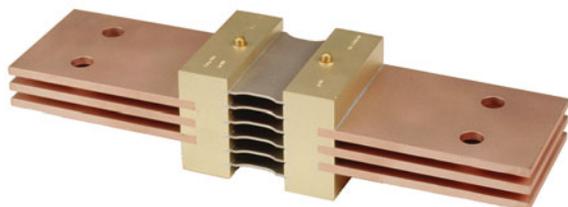

Type WT ▲

Type A — 20 Through 600 Amperes

ORDERING INFORMATION

Amp	Type A — 50 mV			Type A — 100 mV		
	Length	Width	Order Code	Length	Width	Order Code
20	4.125"	0.675"	A-20-50			
50	4.125"	0.675"	A-50-50	5.75"	0.675"	A-50-100
75	4.125"	0.675"	A-75-50	5.75"	0.675"	A-75-100
100	4.125"	0.675"	A-100-50	5.75"	0.675"	A-100-100
125	4.125"	0.813"	A-125-50			
150	4.125"	0.938"	A-150-50	5.75"	0.93"	A-150-100
175	4.125"	0.75"	A-175-50			
200	4.125"	0.813"	A-200-50	5.75"	0.813"	A-200-100
250	4.125"	1.063"	A-250-50	5.75"	1.063"	A-250-100
300	4.125"	1.25"	A-300-50	5.75"	1.25"	A-300-100
375	4.625"	0.938"	A-375-50	6.25"	0.938"	A-375-100
400	4.625"	1.00"	A-400-50	6.25"	1.00"	A-400-100
500	4.625"	1.25"	A-500-50	6.25"	1.25"	A-500-100
600	4.625"	1.50"	A-600-50	6.25"	1.50"	A-600-100

Type B — 300 Through 1000 Amperes

ORDERING INFORMATION

Amp	Type B — 50 mV			Type B — 100 mV		
	Length	Width	Order Code	Length	Width	Order Code
300	5.875"	1.75"	B-300-50	7.75"	1.75"	B-300-100
400	5.875"	2.00"	B-400-50	7.75"	2.00"	B-400-100
500	5.875"	2.00"	B-500-50	7.75"	2.00"	B-500-100
600	5.875"	2.00"	B-600-50	7.75"	2.00"	B-600-100
750	5.875"	2.25"	B-750-50	7.75"	2.25"	B-750-100
800	5.875"	2.375"	B-800-50	7.75"	2.375"	B-800-100
1000	5.875"	2.50"	B-1000-50	7.75"	2.50"	B-1000-100
1200	5.875"	3.00"	B-1200-50	7.75"	3.00"	B-1200-100

Type C — 1000 Through 2000 Amperes

ORDERING INFORMATION

Amp	Type C — 50 mV			Type C — 100 mV		
	Length	Width	Order Code	Length	Width	Order Code
1000	9.063"	2.625"	C-1000-50	10.875"	2.625"	C-1000-100
1200	9.063"	3.00"	C-1200-50	10.875"	3.00"	C-1200-100
1500	9.063"	3.00"	C-1500-50	10.875"	3.00"	C-1500-100
2000	9.063"	3.25"	C-2000-50	10.875"	3.25"	C-2000-100

Type E — 1500 Through 2000 Amperes

ORDERING INFORMATION

Amp	Type E — 50 mV			Type E — 100 mV		
	Length	Width	Order Code	Length	Width	Order Code
1500	9.625"	3.00"	E-1500-50	11.25"	3.00"	E-1500-100
2000	9.625"	4.00"	E-2000-50	11.25"	4.00"	E-2000-100

Type WT — 600 Through 10000 Amperes

ORDERING INFORMATION

Amp	Type WT — 50 mV			Type WT — 100 mV		
	Length	Width	Order Code	Length	Width	Order Code
600				12.0"	3.0"	WT-600-100
750				12.0"	3.0"	WT-750-100
800				12.0"	3.0"	WT-800-100
1000	9.063"	3.0"	WT-1000-50	12.0"	3.0"	WT-1000-100
1200	9.063"	3.0"	WT-1200-50	12.0"	4.0"	WT-1200-100
1500	9.063"	3.0"	WT-1500-50	18.5"	4.0"	WT-1500-100
2000	9.063"	4.0"	WT-2000-50	18.5"	4.0"	WT-2000-100
2500	15.625"	4.0"	WT-2500-50	18.5"	5.0"	WT-2500-100
3000	15.625"	4.0"	WT-3000-50	18.5"	5.0"	WT-3000-100
4000	15.625"	5.0"	WT-4000-50	18.563"	5.0"	WT-4000-100
5000	15.625"	5.0"	WT-5000-50	18.563"	5.0"	WT-5000-100
6000	15.625"	6.0"	WT-6000-50	18.563"	6.0"	WT-6000-100
7500	15.625"	6.0"	WT-7500-50			
8000	15.625"	6.0"	WT-8000-50			
10000	16.0"	8.0"	WT-10000-50			